





| Terminal | |
|----------|----------|
| No. | Pin Name |
| 1 | VSS |
| 2 | VDD |
| 3 | VDD |
| 4 | CS |
| 5 | SDA |
| 6 | SCLK |
| 7 | NC |
| 8 | NC |
| 9 | NC |
| 10 | NC |
| 11 | NC |
| 12 | NC |
| 13 | NC |
| 14 | NC |
| 15 | A0 |
| 16 | NC |
| 17 | RES |
| 18 | NC |
| 19 | BLA |
| 20 | BLK |

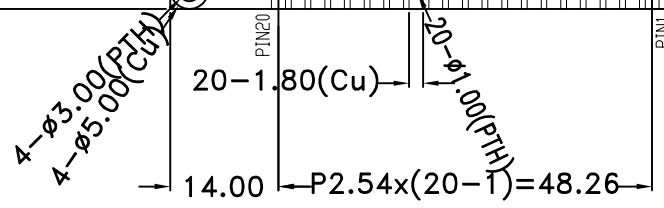

| | | | |
|-----------------------|--------------------------------|------------------|-----------------------|
| *1. LCD Display Type | STN-Blue,Transmissive,Negative | | |
| *2. Viewing Direction | 6H | *6. Storage Temp | -30°C~80°C |
| *3. LCD Driver Mode | 1/64Duty,1/9Bias | *7. Driver IC | ST7567 |
| *4. Operating Voltage | 3.3V | *8. Backlight | WHITE VF=3.0V If=45mA |
| *5. Operating Temp | -20°C~70°C | *9. RDHS | |

| HOT DISPLAY | | | |
|-------------------------------------|----------|------------------|--|
| Dwg Title: HTM12864-122-25W-N3S-V01 | | | |
| EDC No: | | Ver: A/0 | |
| Scale: 1:1 | Unit: mm | Tol: ±0.3 | |
| Drawn: | Checked: | Date: 2022-09-06 | |