



- Specification:
- 1) Driving: Duty: 1/64, Bias:1/9, VLCD:9,
 - 2) Viewing angle: 6.0'clock
 - 3) Display mode: STN/Blue/Negative/Transmissive
 - 4) Operating temp.: 0~+50°C
 - 5) Storage temp.: -10~+60°C
 - 6) IC: S6B0108
 - 7) Backlight: LED, White

PCB

| TEST PIN | NAME |
|----------|------|
| 1 | VDD |
| 2 | VSS |
| 3 | DB0 |
| 4 | DB1 |
| 5 | DB2 |
| 6 | DB3 |
| 7 | DB4 |
| 8 | DB5 |
| 9 | DB6 |
| 10 | DB7 |
| 11 | RST |
| 12 | RAW |
| 13 | RS |
| 14 | E |
| 15 | CS1 |
| 16 | CS2 |
| 17 | LEDA |
| 18 | LEDK |

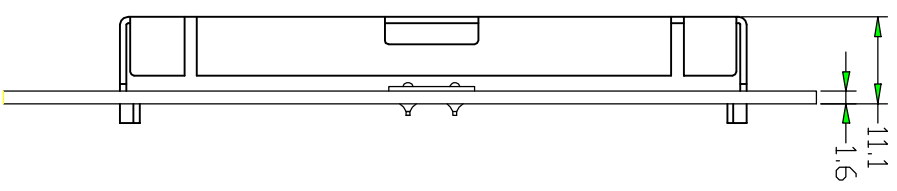

HOT DISPLAY

Dwg Title HTM12864-30

Dwg No. Date 2008-9-5

Scale Unit mm Tol. ±0.2

Drawn JDU Checked Approved